
Junction Box

JB06

Features

- Cast aluminum, plastic–sprayed
- East to assemble and calibrate, high reliability
- Fully encapsulated, water–proof, moistureproof and lightning protected.
- Surge protection
- Sensitivity matched adjusting method
- Operating temperature: –40℃ ~+85℃

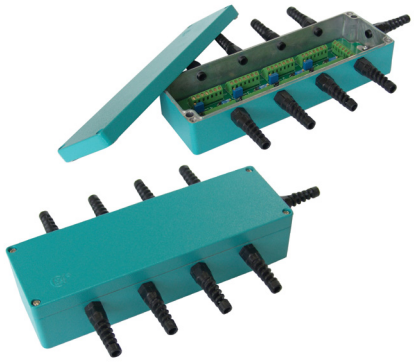

Description

- Specially designed for scales
- This model are available to connect 2 to 8 load cells with 4–wire or 6–wire cable on different requests.

Optional table

Part number	Channels
JB06–2	2
JB06–3	3
JB06–4	4
JB06–6	6
JB06–8	8

Dimensions in mm

