
HY-8-101

Alloy steel,assembled with: H8,HM8





Capacity	Part number
0.5t-3t	HY-8-101-0.5/3t
5t	HY-8-101-5t
10t-15t	HY-8-101-10/15t
20t-25t	HY-8-101-20/25t
30t	HY-8-101-30t
50t	HY-8-101-50t

Dimension / Capacity	ΦD	H	H1
0.5t-3t	35(1.38)	44.9(1.77)	24.9(0.98)
5t	42(1.65)	56.7(2.23)	34.7(1.37)
10t-15t	57(2.24)	80.7(3.18)	66.7(2.63)
20t-25t	70(2.76)	85(3.35)	67(2.64)
30t	70(2.76)	91(3.58)	70(2.76)
50t	85(3.35)	102(4.04)	82(3.23)


SHORT DESCRIPTION

- Easy installation, automatically centralized with steel ball, good self-aligning ability.
- Mainly used for platform scale,floor scale and other electronic weighing devices.

HM-8-401

Alloy steel,assembled with: H8,HM8



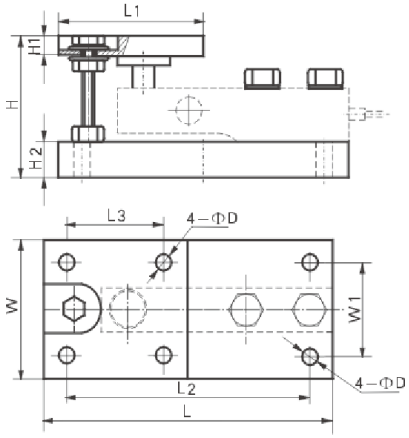

SHORT DESCRIPTION

- Compact construction, easy installation
- With anti-reversal ability
- With anti-overloading ability
- With self-aligning ability
- Using under heavy static load or slight dynamic load

SPECIFICATION					
Capacity	t	0.5-3	5	10-15	20
Ultimate load	%FS	150	150	150	150
Max.Horizontal displacement	mm	±2	±2.5	±4	±4
Max.anti-rotation	kN	3	10	30	50
Material	Alloy steel				

OPTIONAL TABLE		
Part number	Designation	Cutline
HM-8-401-1	Fixed	◯
HM-8-401-2	Half-floating	⊖
HM-8-401-3	Floating	⊕

Capacity / Dimension	0.5t~3t	5t	10t~15t	20t
L	240 (9.45)	300 (11.8)	355.6 (14.0)	406.4 (16.0)
L1	114.3 (4.5)	152.4 (6.0)	203.2 (8.0)	228.6 (9.0)
L2	214.6 (8.45)	249.2 (9.81)	304.8 (12.0)	342.9 (13.5)
L3	88.9 (3.5)	101.6 (4.0)	152.4 (6.0)	165.1 (6.5)
H	104.8 (4.13)	152.4 (6.0)	190.5 (7.5)	228.6 (9.0)
H1	25.4 (1.0)	42 (1.65)	44.5 (1.75)	50.8 (2.0)
H2	25.4 (1.0)	42 (1.65)	44.5 (1.75)	50.8 (2.0)
W	114.3 (4.50)	152.4 (6.0)	203.2 (8.0)	228.6 (9.0)
W1	88.9 (3.5)	101.6 (4.0)	152.4 (6.0)	165.1 (6.5)
D	11 (0.43)	17.5 (0.69)	20.6 (0.81)	25.5 (1.0)